


## INSTALLATION INSTRUCTIONS

# ALI BATH TAPS (Pair) 15mm CHROME - PUNABATHT2.CP

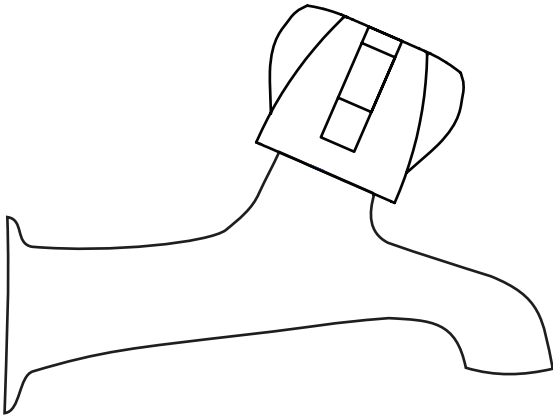

Congratulations on your purchase of this high quality product.  
Please read the following before installation and retain (along with your receipt) for future reference.

### **TECHNICAL SPECIFICATIONS**

#### **Suitable for All Pressures**

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa\* (As per NZ Building Code AS/NZ 3500.1)

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### **CONFIGURATION**

#### **Mains Pressure systems**

Install as supplied.

#### **Unequal Low systems**

Install as supplied.

#### **Equal Low systems**

Install as supplied.

### **INSTALLATION**

\*For pressures exceeding 500kPa install a pressure reducing valve. Thoroughly flush all pipes to eliminate any remaining dirt and residue, and install inline filters. Failure to do so may void the warranty. To be installed as per the requirements with AS/NZ 3500.

ATTACH PROOF OF PURCHASE HERE

- Cut 15mm screwed tube to allow for a minimum 15mm wall protrusion and install. NB: it is essential to apply either Teflon sealing tape or graphite & hemp around the screwed tube prior to installation.
- Turn on water supply. Check for leaks.

**NOTE:** In order to remove handles, the chrome indicator disc needs to be prised out, and then the handle retaining screw can be undone.

### **WARRANTY**

**Please call us before removing or undertaking any repair work.**

Warranties apply to residential domestic use only. Warranty is void if product is not installed according to our specifications.

In the unlikely event that this product fails during its warranty period, phone 0800 508 009, visit [www.harrisonbloy.co.nz](http://www.harrisonbloy.co.nz), email [info@harrisonbloy.co.nz](mailto:info@harrisonbloy.co.nz) or reach out to your local Harrison Bloy immediately as unauthorised removal of the product may void the warranty.

### **CARE AND MAINTENANCE**

**Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.**

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.