

Pura

55×36 swirlflush



Wc
55×36 cm
30,5 kg

Back to wall Wc with wall or floor (through a pipe fitting) outlet with **Swirlflush®** system.



swirlflush®



extraglaze® antibacterial



quickrelease



softclose

Colours

Finish Options



Codes

PU55F.WH
PU55F.BM
PU55F.NS
PU55FCS
PU55F.CT
PU55F.TO



GM



CR



WH






BB




BL



BN




* Waste setout
** Fixing position

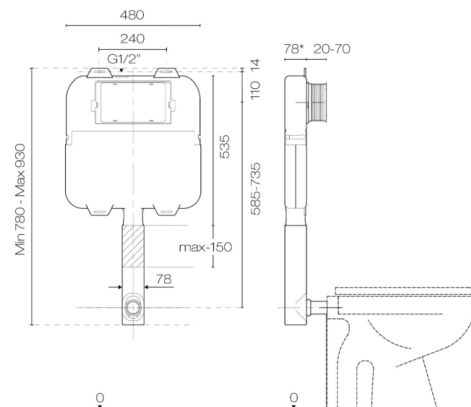

*Min. recommended wall cavity thickness required : 90mm

plumbline.co.nz

www.plumbline.co.nz

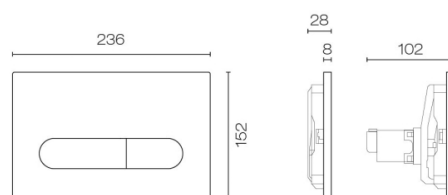

Note - Minimum wall thickness of 20mm