


ENYA

Tapware

INSTALLATION MANUAL
PRODUCT CARE & MAINTENANCE
WARRANTY GUIDE

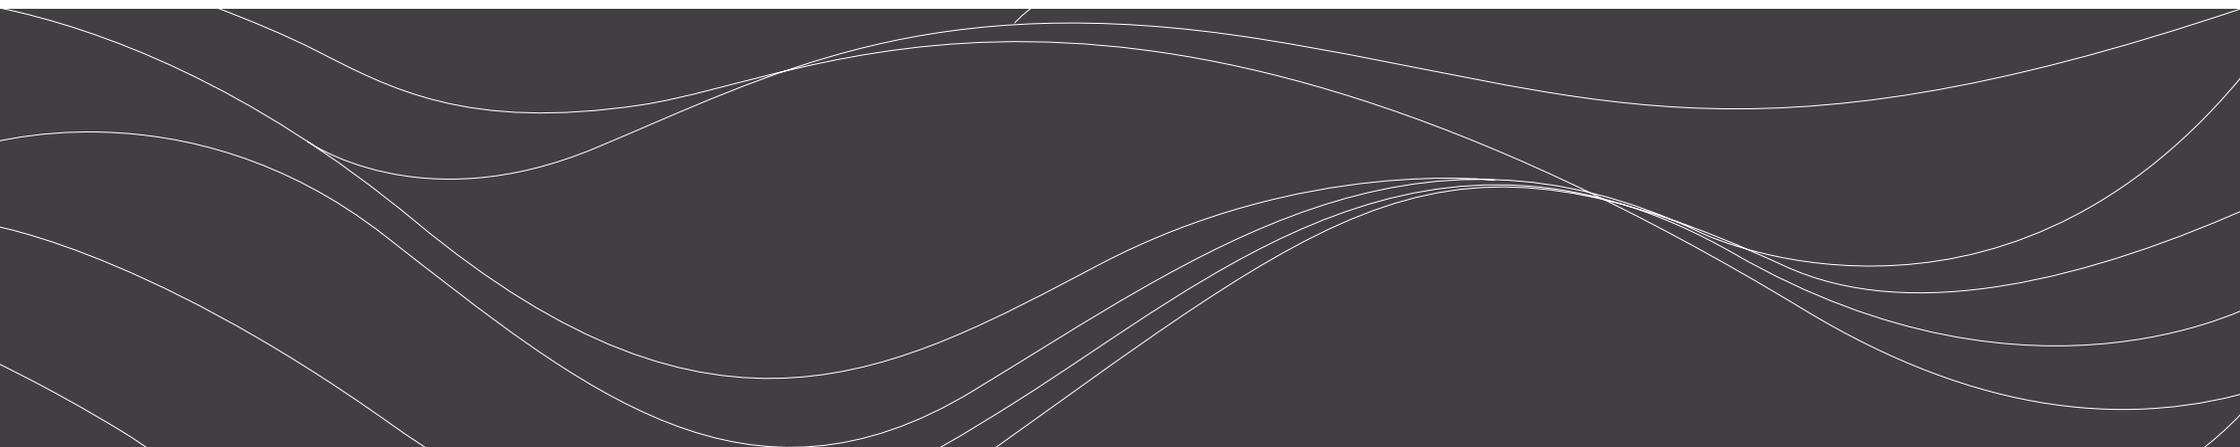

TOOLS AND HARDWARE REQUIRED:




ADJUSTABLE WRENCH



SAFETY GOGGLES




SCREWDRIVER

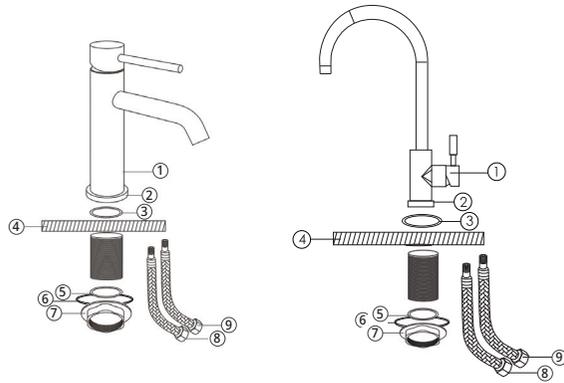


1

Make sure there is a 35-40mm hole in the basin before fixing the faucet. Unscrew the fixing set (lock nut with screws, washer & rubber cushion) from the bottom of the body, then put the tap through the hole. Ensure the O-Ring is placed between the basin and bottom of the mixer. Put the mixer through the basin hole.

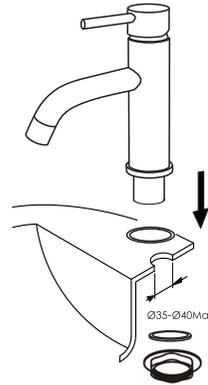


3

Ensure the mixer is positioned correctly and then use spanner to tighten the lock nut. Use a screwdriver to tighten the screws on the lock nut, ensuring the mixer is firmly installed and does not move.

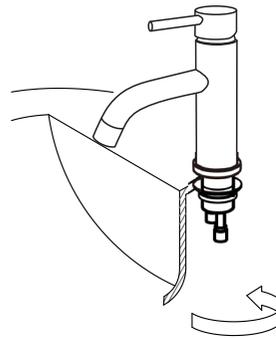


2

From underneath the basin, install the fixing set, ensuring the rubber cushion is placed against the basin, then the s/s washer and the lock nut. Hand tighten the lock nut so that it is firm against the basin.

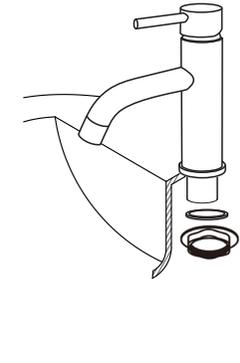

4

Connect the inlet hose from the body, "Red" for connecting to the hot water, and "Blue" for connecting the cold water.

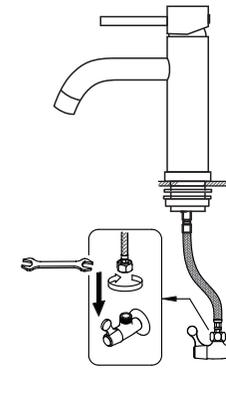

5

Please check if there is any leakage after assembly.

No	Part Name
1	Main Body
2	Faucet Base (Built-in)
3	Rubber O Ring
4	Thread Pipe
5	Rubber Cushion
6	Washer
7	Lock Nut
8	Water Supply Line
9	Water Supply Line

IMPORTANT INFORMATION

It is recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.


Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.




Lusso Bath Spout & Thinline



Lusso Bath Spout

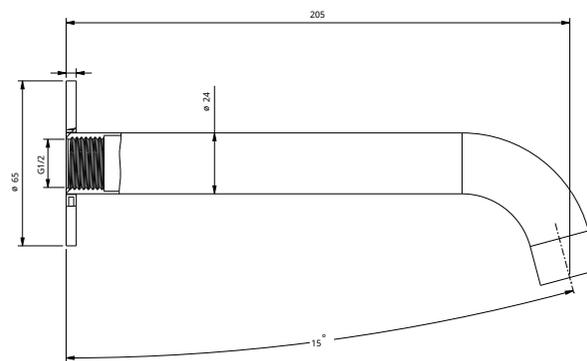

Lusso Bath Spout Thinline

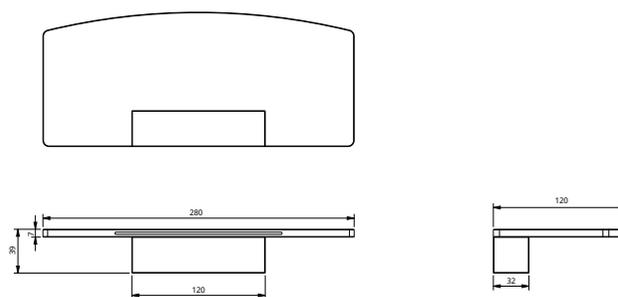

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- Flush out all pipe work prior to installation.
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Inline strainer / filter must be installed in the line before the mixer to cover both hot and cold supplies (not supplied). Must be accessible.

TECHNICAL DATA

- Suitable for use with high pressure water supply only. Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 150kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 70°C
- If the Water temperature exceeds 70°C an approved Tempering Valve must be fitted.

Please leave this form with the product once installed.

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.


WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.

Tapware Residential Warranty: 10 years
Tapware Commercial Warranty: 1 year


Full details, including terms and exclusions, can be found at enya.nz/warranty.

BATH SPOUT

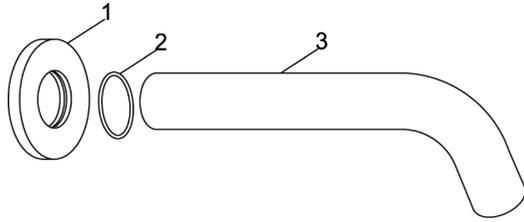


- 1 Apply pipe sealant to the wall male thread outlet.
- 2 Slide the back plate (1) onto the spout, make sure that the rubber ring (2) is in place.
- 3 Firmly fasten spout (3) to wall male thread.
- 4 Please check if there is any leakage after assembly.


BATH SPOUT THINLINE

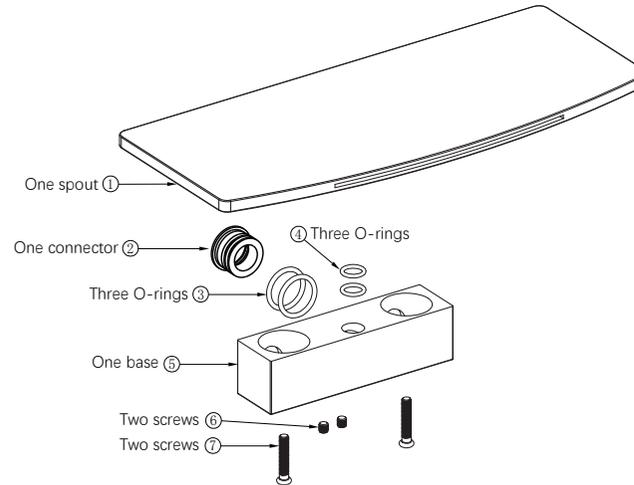


- 1 On both sides of the vertical wall, fix the main body position, drill a screw on each side, then insert the connector into the water pipe and embed the O ring into the water outlet.



- 2 Align the spout with the position and tighten the outlet pipe. Lock screws on both sides to fix the base.

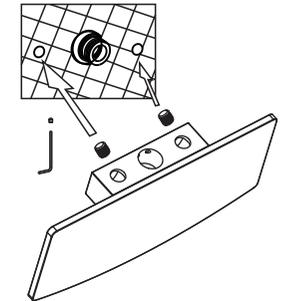

- 3 Check whether all connecting nuts are tightened. Turn on the main water source and check for any leakage. If there is any leakage, please repair it.

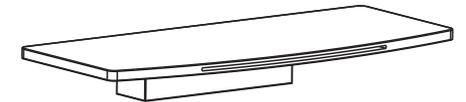

IMPORTANT INFORMATION

It is recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.



ENYA




Wall Basin Mixer & Shower Mixer



Lusso Wall Basin Mixer

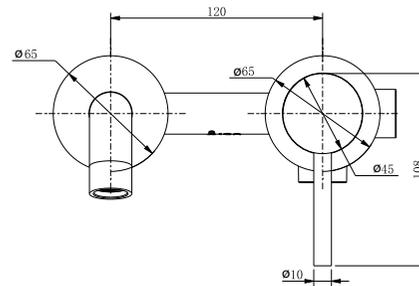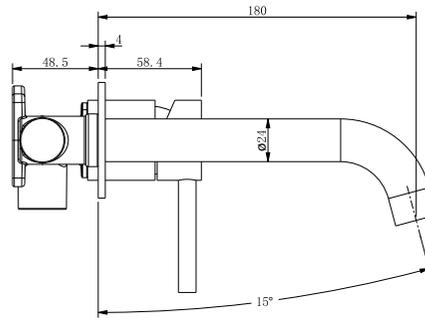

Lusso Shower Mixer

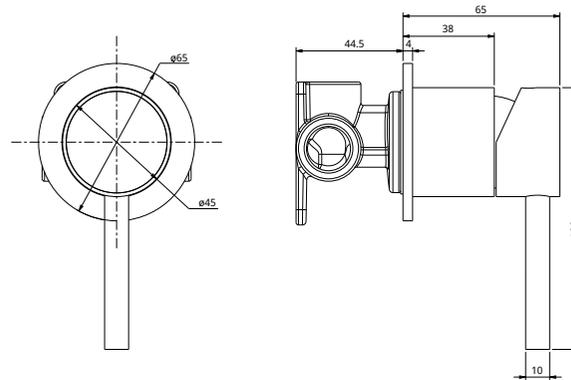

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- Flush out all pipe work prior to installation.
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Inline strainer / filter must be installed in the line before the mixer to cover both hot and cold supplies (not supplied). Must be accessible.

TECHNICAL DATA

- Suitable for use with high pressure water supply only. Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 150kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 70°C
- If the Water temperature exceeds 70°C an approved Tempering Valve must be fitted.

Please leave this form with the product once installed.

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.

Tapware Residential Warranty: 10 years


Tapware Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
 0800 508 009

TOOLS AND HARDWARE REQUIRED:

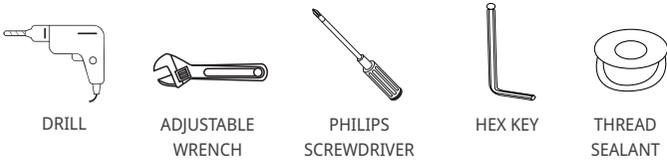


SHOWER MIXER DETAILS:

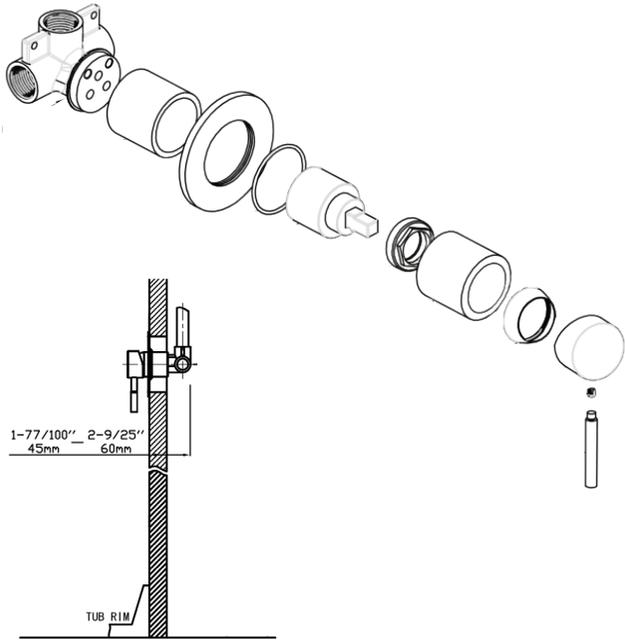


IMPORTANT INFORMATION

It is recommended that this product is installed by a qualified plumber.
Remove all packaging and check product to ensure it has not been damaged or any parts are missing.
Before installing please make sure this is the correct model and you have all the parts required for installation and usage.
The product must be installed in accordance with AS/NZS 3500.
This product complies with WELS and Watermark requirements.
Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.


- 1 Confirm the location of the concealed faucet body, then drill three holes on the wall.

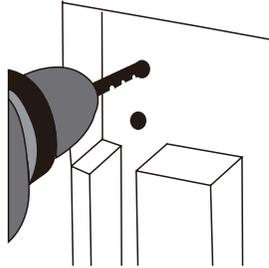


- 2 Basin Mixer: Install the concealed faucet of wall basin mixer body.

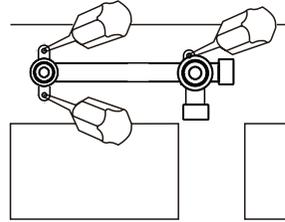


Shower Mixer: Confirm the installed place and fixed the shower valve body on the wood block.




- 3 Connect hot and cold water inlet pipes.

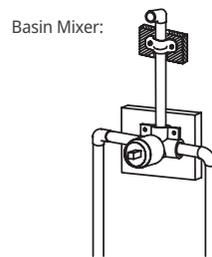


Shower Mixer:



- 4 Each pipe shall be pressure tested to ensure no leakage.

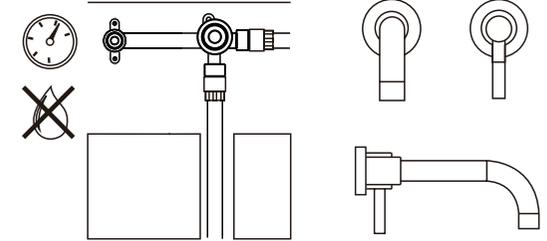


- 5 Basin Mixer: Waiting the wall to be tiled.





Shower Mixer: Please cut the size of the tile hole according to the size and the shape of the cover panel.

After the wall is finished, put the outside sleeve into the inside sleeve and, install and tighten the decorative cap.




- 6 Install the handles as the picture shows.

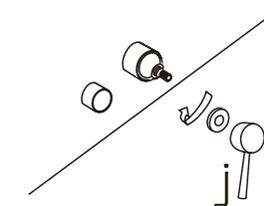

- 7 Basin Mixer: Install the outlet pipe tightly.

Shower Mixer: Install the handle and tighten the screw.




ENYA



Lusso Sink Mixer POS



Lusso Sink Mixer POS

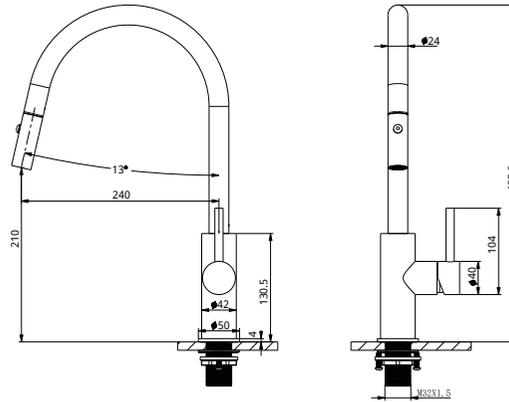

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- Flush out all pipe work prior to installation.
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Inline strainer / filter must be installed in the line before the mixer to cover both hot and cold supplies (not supplied). Must be accessible.

TECHNICAL DATA

- Suitable for use with high pressure water supply only. Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 150kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 70°C
- If the Water temperature exceeds 70°C an approved Tempering Valve must be fitted.

Please leave this form with the product once installed.

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.


A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.

Tapware Residential Warranty: 10 years
Tapware Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.

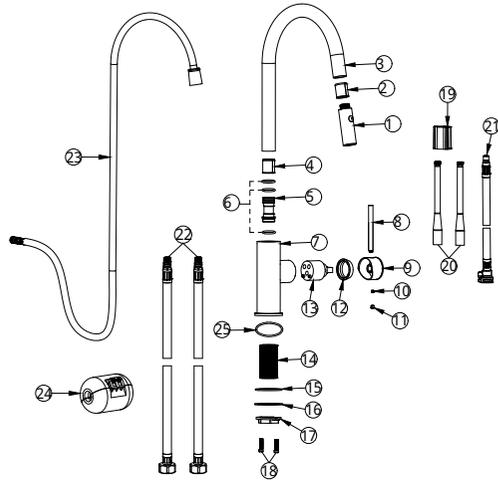

No	Part Name		
25	O-ring	12	Cartridge cap
24	Weight ball	11	Rubber plug
23	Pull-out hose	10	Screw
22	Inlet hose	9	Handle
21	Outlet hose	8	Handlebar
20	Extension tube	7	Faucet body
19	Seperate	6	O-ring
18	Screw	5	Rotated connector
17	Lock nut	4	Gasket
16	Stainless steel gasket	3	Rotated spout
15	Rubber gasket	2	Gasket
14	Thread pipe	1	Spray head
13	φ35 Keox cartridge		

IMPORTANT INFORMATION




It is recommended that this product is installed by a qualified plumber.
 Remove all packaging and check product to ensure it has not been damaged or any parts are missing.
 Before installing please make sure this is the correct model and you have all the parts required for installation and usage.
 The product must be installed in accordance with AS/NZS 3500.
 This product complies with WELS and Watermark requirements.
 Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

1 Unscrew the fixing set (lock nut with screws, washer & rubber cushion) from the bottom of the body.


2 Make sure there is a 35-40mm hole in the sink before fixing the faucet. Ensure the O-ring is placed between the basin and bottom of the mixer. Put the mixer through the basin hole.

3 From underneath the sink, install the fixing set, ensuring the rubber cushion is placed against the basin, then the s/s washer and the lock nut. Hand tighten the lock nut so that is firm against the sink.


4 Ensure the mixer is positioned correctly and then use spanner to tighten the lock nut. Use a screwdriver to tighten the screws on the lock nut, ensuring the mixer is firmly installed and does not move.

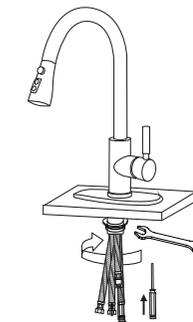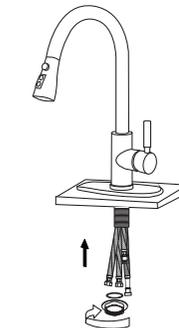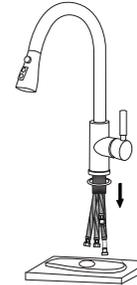


5 Install the gravity ball at the marked place along the draw tube. (The position of the gravity ball will directly affect the pulling distance and the pulling force. Please adjust the position according to your personal use).

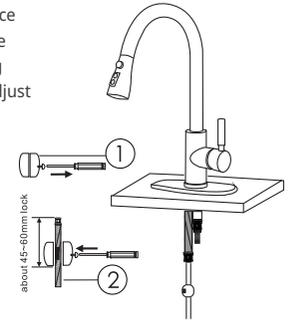

6 Connect the draw-tube, rubber ring should be inserted into the faucet end before connecting.

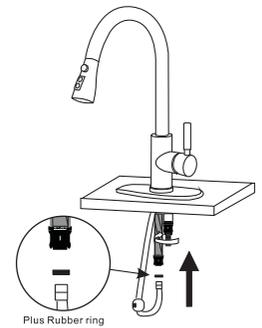

7 Connect the inlet hose to the angle valve according to the hot and cold mark and tighten. Before connecting, please confirm that there is a sealing rubber gasket in the inlet hose connector.

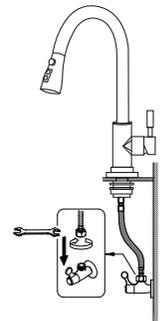




ENYA


Floor Standing Bath Mixers



Lusso Floor Standing Bath Mixer

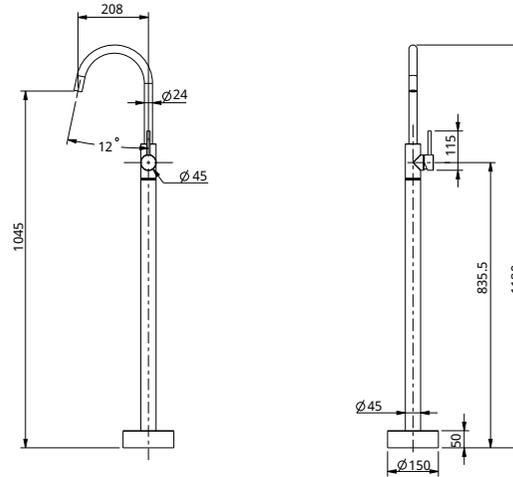

Lusso Floor Standing Bath Mixer with Hand Shower

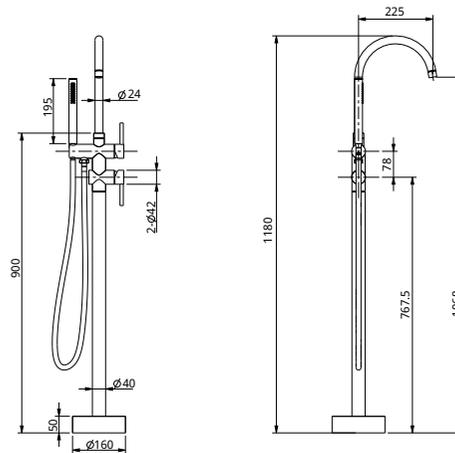

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- Flush out all pipe work prior to installation.
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Inline strainer / filter must be installed in the line before the mixer to cover both hot and cold supplies (not supplied). Must be accessible.

TECHNICAL DATA

- Suitable for use with high pressure water supply only. Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 150kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 70°C
- If the Water temperature exceeds 70°C an approved Tempering Valve must be fitted.

Please leave this form with the product once installed.

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.

Tapware Residential Warranty: 10 years


Tapware Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.

HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
 0800 508 009

TOOLS AND HARDWARE REQUIRED:

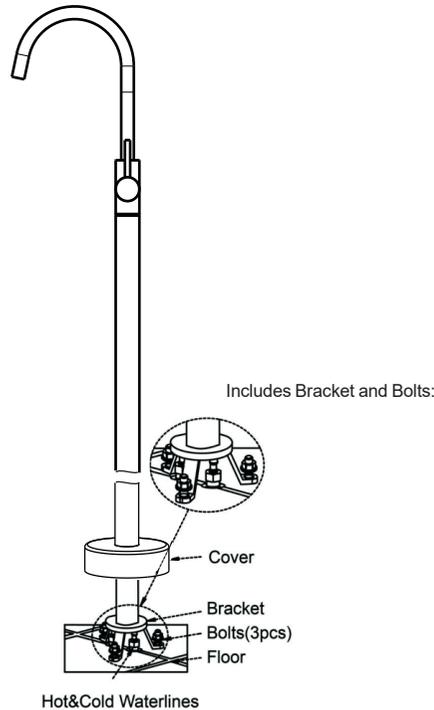

1 Embed the supply hose fittings



2 Put the pipe tape onto the fittings.



3 Use the tripod base which has been installed onto the faucet to mark the holes for the expansion screws into and drill holes



4 Keep the tripod base fastened.



5 Put the waterlines through



6 Put the chrome base through onto the tube



7 Fasten the screws



8 Put in the expansion screws



9 Connect with the waterlines



10 Connect with the waterlines



11 Put down the chrome base

IMPORTANT INFORMATION

It is recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.