ENYA

Showering

INSTALLATION MANUAL
PRODUCT CARE & MAINTENANCE
WARRANTY GUIDE

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- **Flush out all pipe work prior to installation.**
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Please leave this form with the product once installed.

TECHNICAL DATA

- **Suitable for use with mains pressure water supply only.** Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 50kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 65°C

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.


Shower Residential Warranty: 10 years
Shower Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


Lusso Ceiling Shower Arms

Brushed Bronze **BR** | Brushed Brass **BB** | Gunmetal **GN** | Chrome **CP** | Brushed Nickel **BN**

Lusso Ceiling Shower Arm 150mm

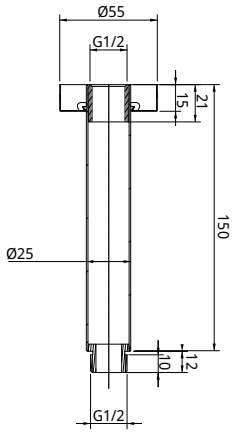

Lusso Ceiling Shower Arm 200mm

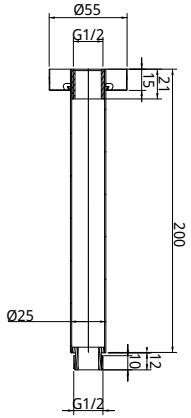

HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
0800 508 009




ENYA


Installation Manual

Lusso Ceiling Shower Arm 150mm — ENLUWSA150
Lusso Ceiling Shower Arm 200mm — ENLUWSA200


PARTS IN THE BOX

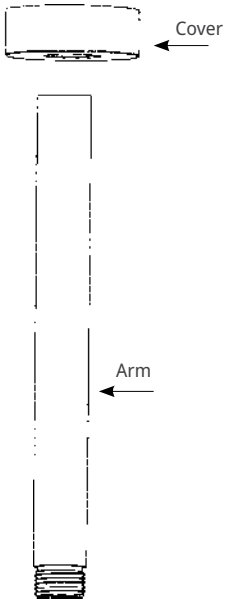

1 Apply PTFE Tape to the nipple (not supplied). Fix the cover to the arm and screw the arm to the nipple.

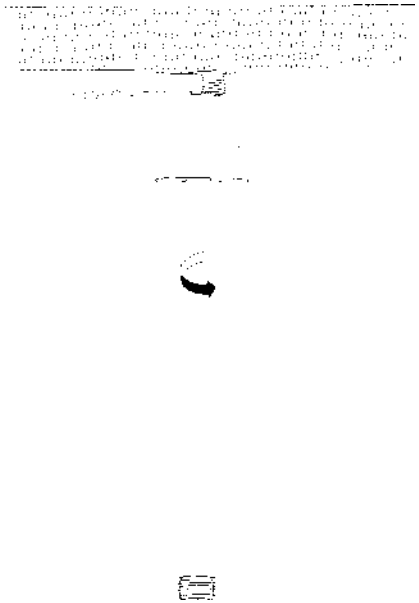

2 After installation, fix the head shower, ensuring that the supplied washer is installed.

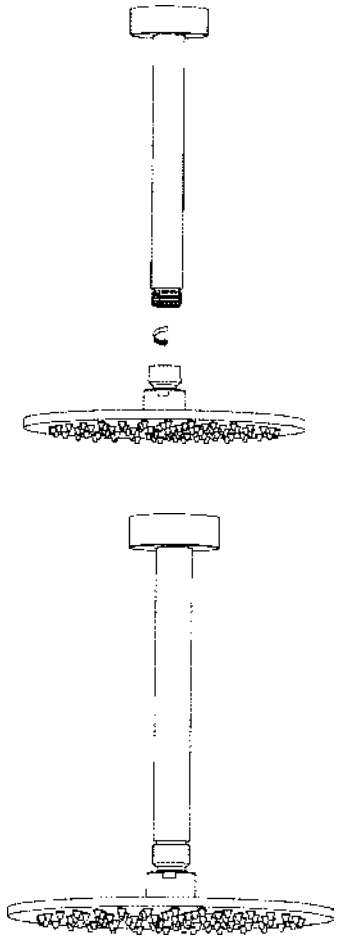

IMPORTANT INFORMATION

It is highly recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

Version 1 — September 2026

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- **Flush out all pipe work prior to installation.**
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Please leave this form with the product once installed.

TECHNICAL DATA

- **Suitable for use with mains pressure water supply only.** Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 50kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 65°C

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.


Shower Residential Warranty: 10 years
Shower Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


Lusso Wall Shower Arms

Brushed Bronze **BR** | Brushed Brass **BB** | Gunmetal **GN** | Chrome **CP** | Brushed Nickel **BN**

Lusso Wall Shower Arm 400mm

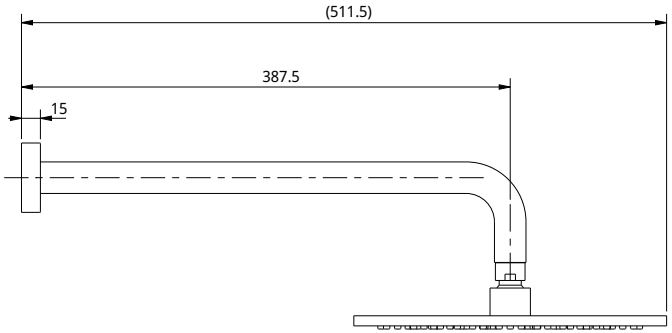

Dimensions shown with the 250mm overhead shower

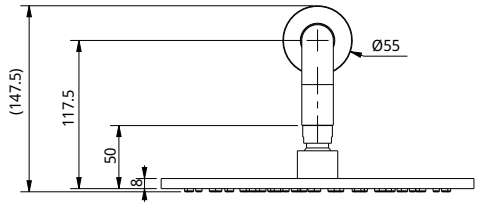

Dimensions shown with the 250mm overhead shower

HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
0800 508 009




ENYA


Installation Manual

Lusso Wall Shower Arm 400mm | ENLUWSA400


PARTS IN THE BOX

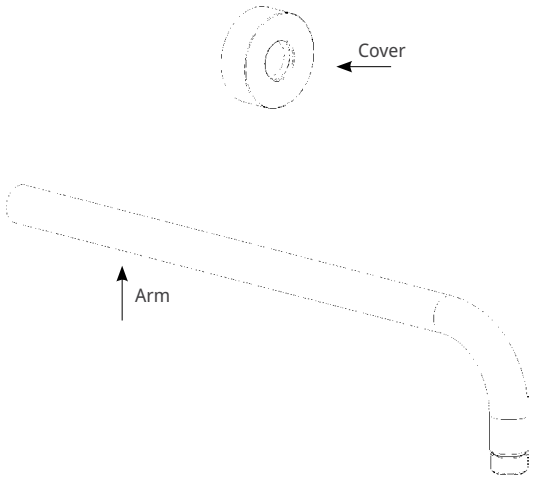

1 Apply PTFE to the nipple (not supplied). Fix the cover to the arm and screw the arm to the nipple.

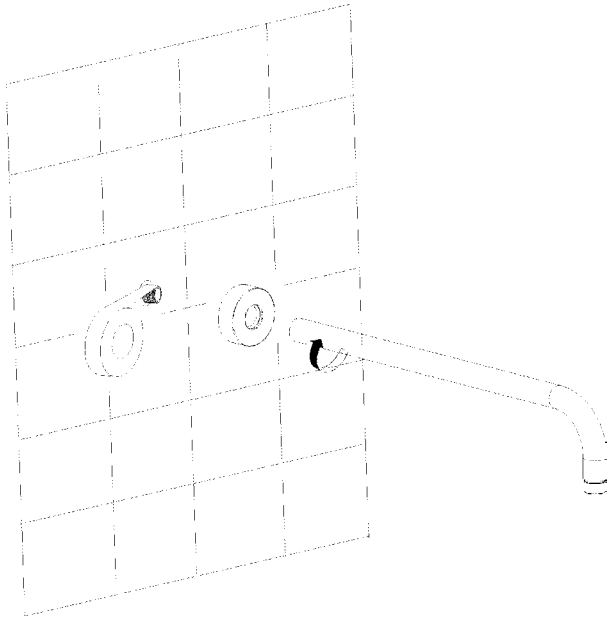

2 After installation, fix the head shower.

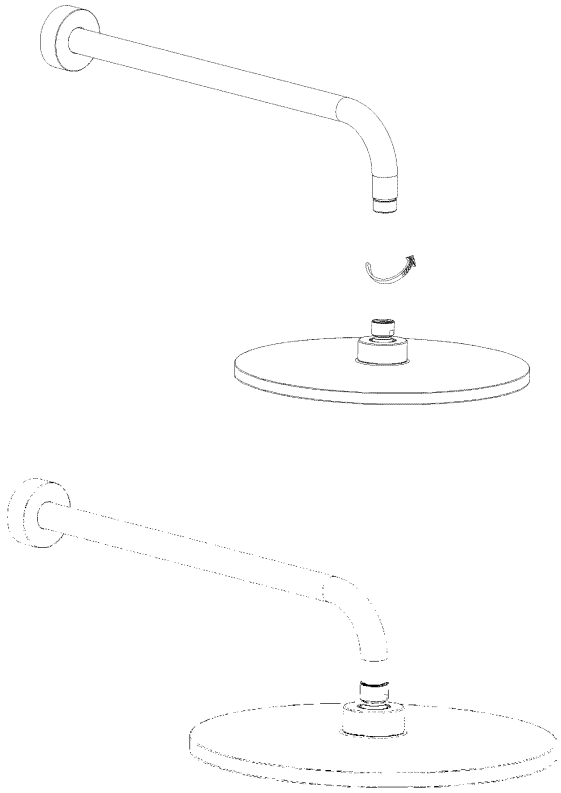

IMPORTANT INFORMATION

It is highly recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

Version 1 — September 2026

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- **Flush out all pipe work prior to installation.**
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Please leave this form with the product once installed.

TECHNICAL DATA

- **Suitable for use with mains pressure water supply only.** Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 50kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 65°C

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.


Shower Residential Warranty: 10 years
Shower Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


Lusso Overhead Showers

Brushed Bronze **BR** | Brushed Brass **BB** | Gunmetal **GN** | Chrome **CP** | Brushed Nickel **BN**

Lusso Overhead Shower 250mm

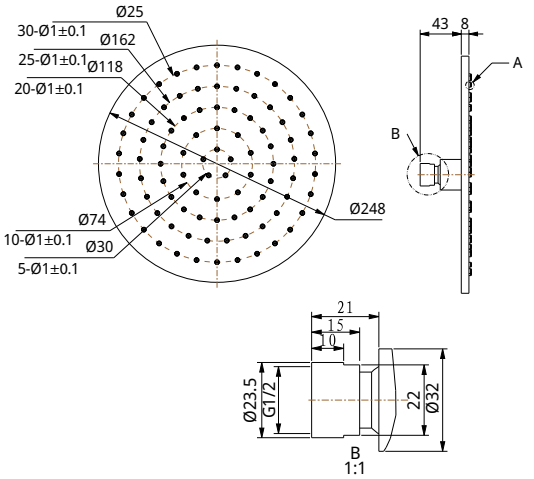

Lusso Overhead Shower 300mm

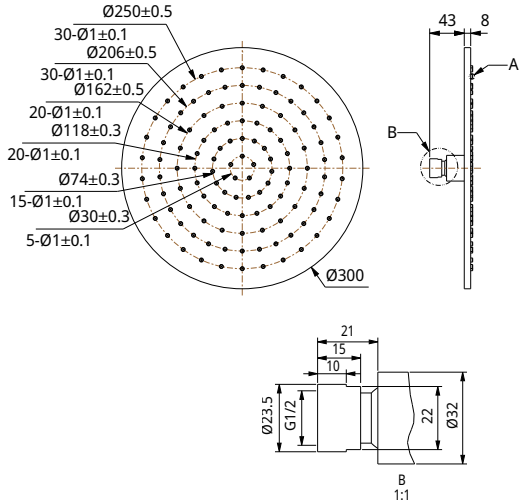

HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
0800 508 009





ENYA

Installation Manual


Lusso Overhead Shower 250mm — ENLUOH250
Lusso Overhead Shower 300mm — ENLUOH300


PARTS IN THE BOX

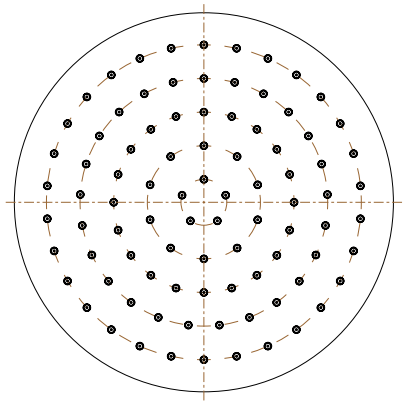



1 Apply PTFE (not supplied) to the thread. Screw the shower head directly onto the shower arm.

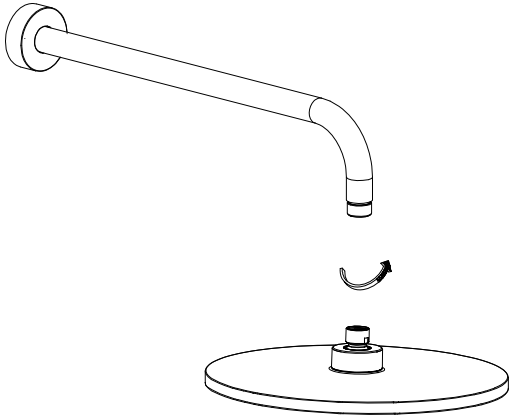

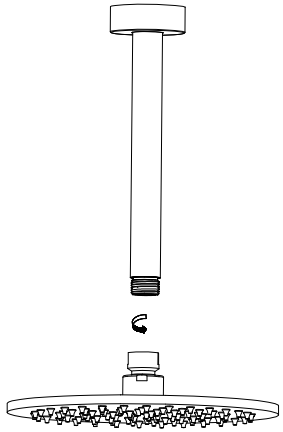

IMPORTANT INFORMATION

It is highly recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

Version 1 — September 2026

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- **Flush out all pipe work prior to installation.**
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Please leave this form with the product once installed.

TECHNICAL DATA

- **Suitable for use with mains pressure water supply only.** Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 50kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 65°C

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.


Shower Residential Warranty: 10 years
Shower Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


Lusso Column Showers

Brushed Bronze **BR** | Brushed Brass **BB** | Gunmetal **GN** | Chrome **CP** | Brushed Nickel **BN**

Lusso Column Shower — Top Inlet

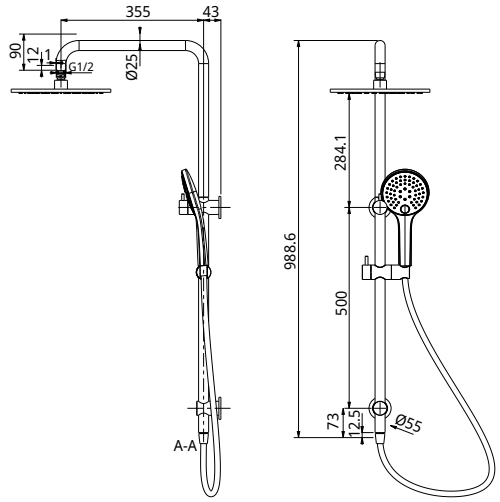


Lusso Column Shower — Bottom Inlet

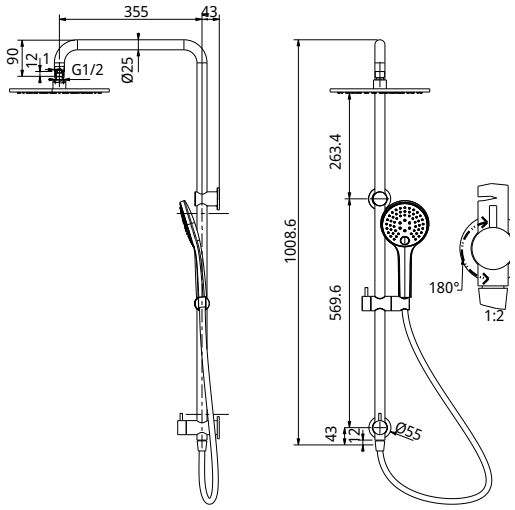

HARRISON/BLOY

www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
0800 508 009

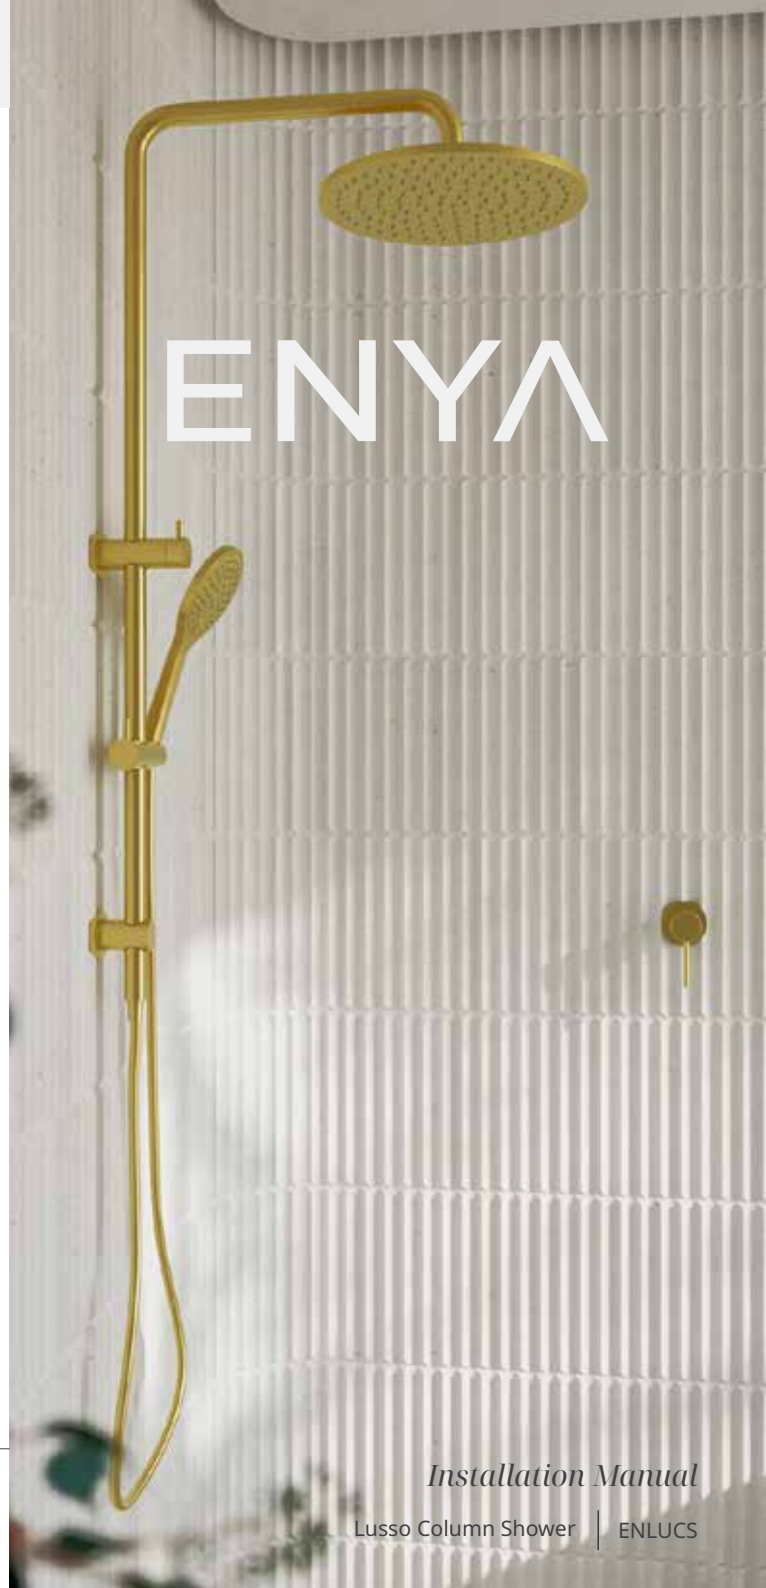


ENYA


Installation Manual

Lusso Column Shower | ENLUCS


PARTS IN THE BOX

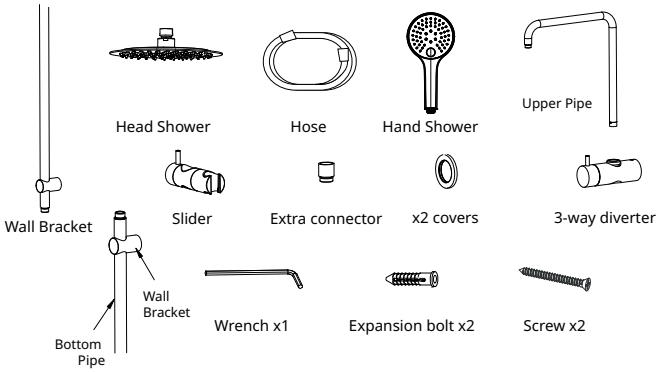


TOP INLET (A)

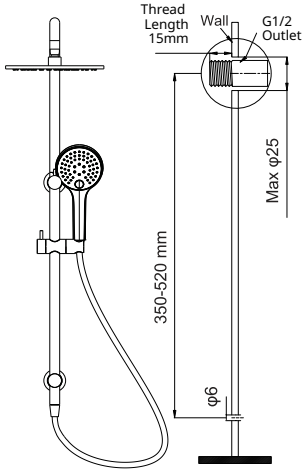


BOTTOM INLET (B)

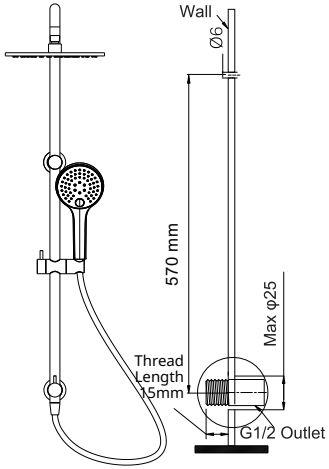


1 Loosen the screws to take out the connector in the 3-way diverter and wall bracket.

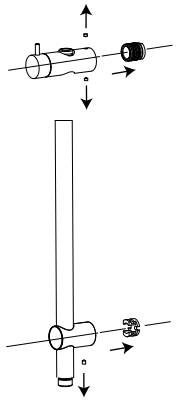


2 Apply PTFE to the male inlet thread and thread the connector to the inlet. Mark the two holes on the opposite end, drill appropriately sized holes, and fix the two expansion bolts. Fix the bottom connector to the wall. NB: Expansion bolts not always used.

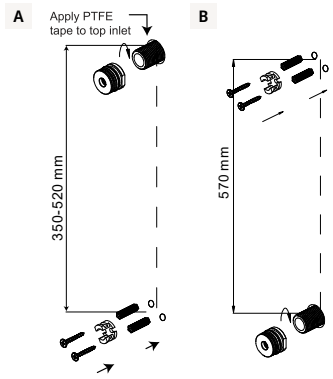


3 Fix the slider onto the top (A) or bottom (B) of the pipe.
Screw the 3-way diverter onto the opposite end.

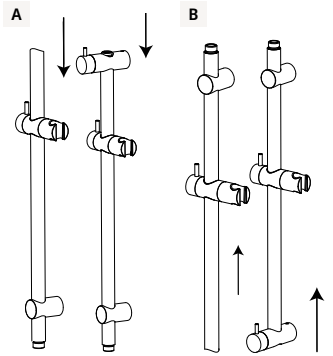


4 Screw the upper pipe onto the 3-way diverter (A) or directly to the pipe (B). If bottom inlet, install the extra connector.

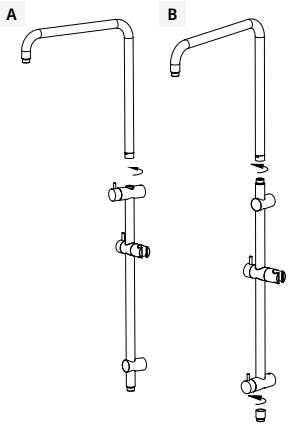


5 Add the covers to the diverter and wall bracket.

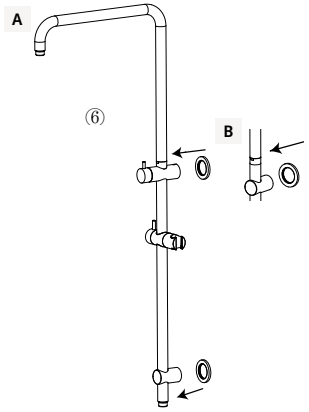

6 Fix the diverter and pillar to the connectors, tighten the screws on both the diverter and pillar.

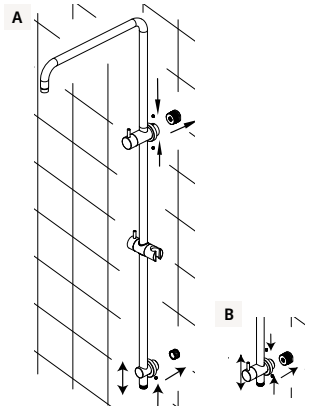

7 Connect hose to handpiece and screw the head shower to the upper pipe.

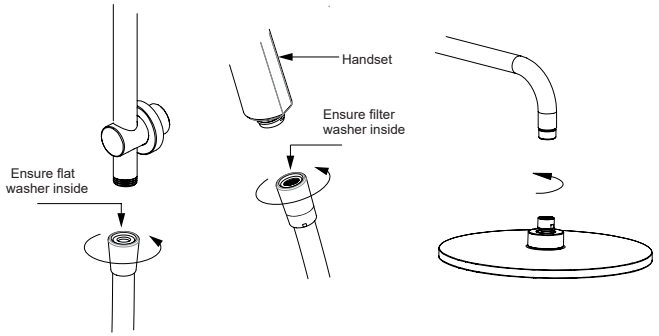

IMPORTANT INFORMATION

It is highly recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

Version 1 — September 2026

PRE-INSTALLATION

Congratulations on your purchase of this high quality product.

Please read the following before installation and retain (along with your receipt) for future reference.

ATTENTION PLUMBER

To ensure the optimum performance and customer satisfaction please adhere to the following:

- **Flush out all pipe work prior to installation.**
- Installation shall be in accordance with the AS/NZS3500 series of standards. **The maximum operating pressure within any building should not exceed 500kpa.** Pressure above 500kpa can cause damage from water hammer, reducing life of appliances, taps and fittings and cause excessive noise in the plumbing system.
- Pressure over 500kPa will require a limiting valve.
- Please leave this form with the product once installed.

TECHNICAL DATA

- **Suitable for use with mains pressure water supply only.** Not suitable for gravity-fed water heaters, low and unequal pressure networks.
- Minimum Water pressure for satisfactory operation: 50kPa
- Maximum Water pressure: 500kPa
- Maximum hot water temperature: 65°C

MAINTENANCE & CARE

Should not be cleaned with acidic, caustic/alkaline, abrasive, or citric cleaners.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

WARRANTY

Enya stands behind every product with comprehensive warranties designed to give you peace of mind. Each item is guaranteed to meet or exceed the requirements of the New Zealand Building Code.


Shower Residential Warranty: 10 years
Shower Commercial Warranty: 1 year

Full details, including terms and exclusions, can be found at enya.nz/warranty.


Slide Showers

Brushed Bronze **BR** | Brushed Brass **BB** | Gunmetal **GN** | Chrome **CP** | Brushed Nickel **BN**

Lusso Slide Shower

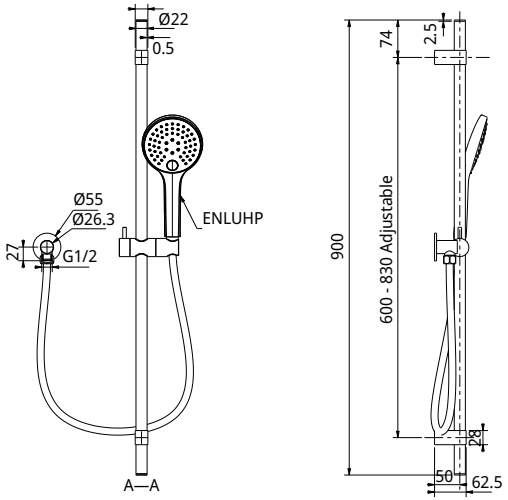

Maya Slide Shower

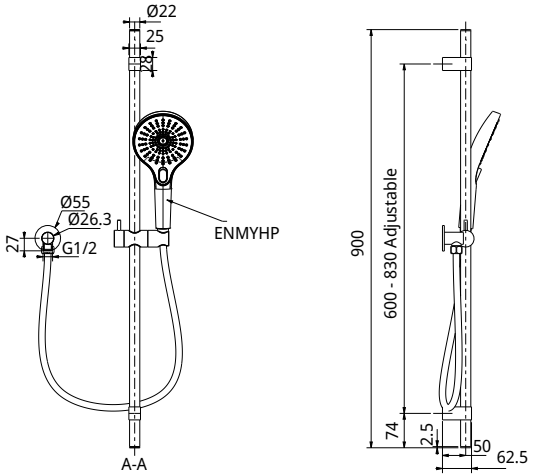

HARRISON/BLOY


www.harrisonbloy.co.nz
info@harrisonbloy.co.nz
0800 508 009

ENYA


Installation Manual

Lusso Slide Shower | ENLUSH
Maya Slide Shower | ENMYSS


PARTS IN THE BOX

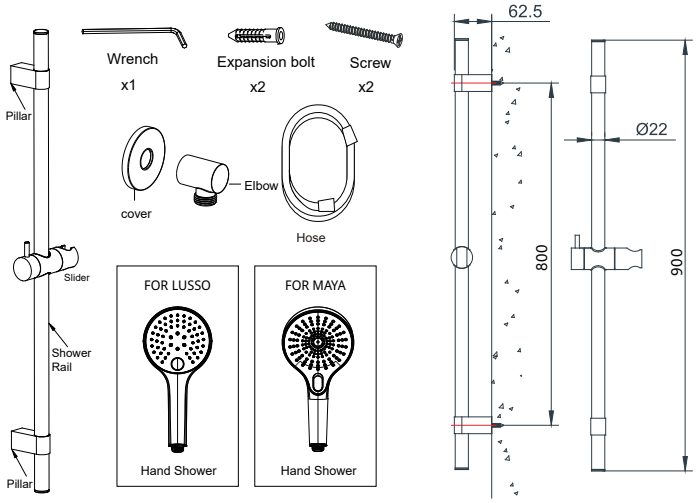


LUSSO SLIDE SHOWER

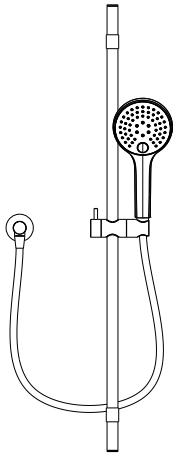


MAYA SLIDE SHOWER

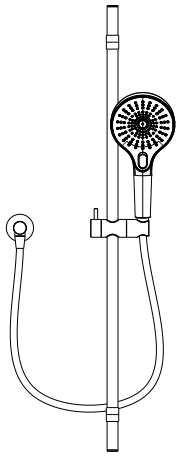


1 Mark two holes on the wall 800mm apart. Ensure there is sufficient fixing.

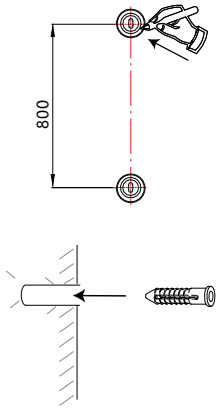


2 Loosen screws on both pillar to take out the connectors.

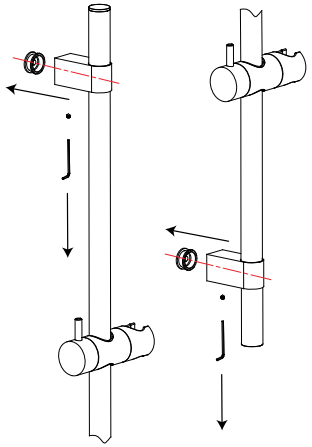

3 Screw connectors to holes.

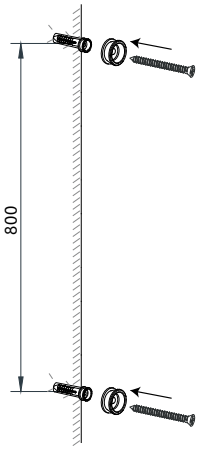


4 Fix pillar to connectors and tighten screws.

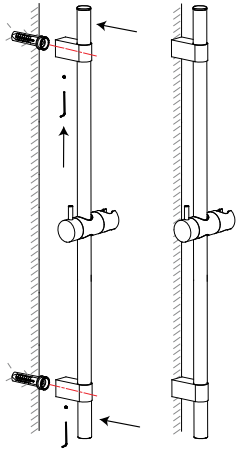


ELBOW INSTALLATION

1 Apply the thread seal tape to the nipple. Screw the elbow onto the nipple. Ensure that the elbow is oriented vertically with outlet oriented downwards.

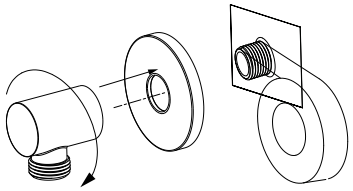

2 Connect the hose to the outlet elbow and handset. Ensure the comical nut is connected to the handset.

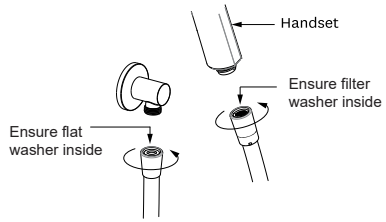

IMPORTANT: Before you begin, turn off the water supply.

IMPORTANT INFORMATION

It is highly recommended that this product is installed by a qualified plumber.

Remove all packaging and check product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The product must be installed in accordance with AS/NZS 3500.

This product complies with WELS and Watermark requirements.

Dimensions are approximate. Information provided on this data sheet is representative of the actual product available at the time of printing. Due to our policy of continuous product development, the designs and specifications depicted are subject to change without notice.

Version 1 — September 2026